

MODEL NO. ENP7150&7155&7160 (ACTIVE PFC)

This specification describes the requirements of 500、550、600Watts with full range voltage, switching power supply with a Micro-ATX(SFX-1.0&1.1) form-factor and SFX 12V,+5V standby voltage, remote on/off .

☞ 1.0 AC INPUT**1.1 AC input requirements**

The input voltage, current, and frequency requirements for continuous operation are stated below

Parameter	Min	Nom	Max	Unit
Vin	90	100-240	264	VACrms
Vin Frequency	47	60---50	63	Hz
Iin(500W)		7---3.5		Arms
Iin(550W)		8---4.0		Arms
Iin(600W)		9---4.5		Arms

Power factor correction (PF)>0.90 at full load.

1.2 Inrush current regulation

The power supply must meet inrush requirements for any rated AC voltage, during turn on at ar phase of AC voltage, during a single cycle AC dropout condition, during repetitive ON/OFF cyclin AC, and over the specified temperature range (Top). The peak inrush current shall be less than ratings of its critical components (including input fuse, bulk rectifiers, and surge limiting device).

☞ 2.0 DC OUTPUT**2.1 DC voltage regulation**

Parameter	Range	Min	Nom.	Max	Unit
+3.3V	±3%	+3.2	+3.3	+3.4	Volts
+5V	±3%	+4.85	+5.0	+5.15	Volts
+12V	±3%	+11.64	+12.0	+12.36	Volts
-12V	±10%	-10.8	-12.0	-13.2	Volts
+5VSb	±5%	+4.75	+5.0	+5.25	Volts

(1)At no load,3.3V output +/-5% regulation limits do not apply.

2.2 LOAD RANGE**2.2.1 (500 Watts)**

Parameter	Min	Nom.	Max	Peak	Unit
+3.3V	0	-	20		Amps
+5V	0	-	15		Amps
+12V	0	-	40		Amps
-12V	0	-	0.3		Amps
+5VSb	0	-	2.5		Amps

Notes:

- (1) The maximum combined load on +5V and +3.3V outputs shall not exceed 90W.
- (2) The maximum combined load on +12V outputs shall not exceed 480W(40A).
- (3) The maximum continuous average DC outputs power shall not exceed 500W.

2.2.2 (550 Watts)

Parameter	Min	Nom.	Max	Peak	Unit
+3.3V	0	-	20		Amps
+5V	0	-	15		Amps
+12V	0	-	45		Amps
-12V	0	-	0.3		Amps
+5VSb	0	-	2.5		Amps

Notes:

- (1) The maximum combined load on +5V and +3.3V outputs shall not exceed 90W.
- (2) The maximum combined load on +12V outputs shall not exceed 540W(45A).
- (3) The maximum continuous average DC outputs power shall not exceed 550W.

2.2.3 (600 Watts)

Parameter	Min	Nom.	Max	Peak	Unit
+3.3V	0	-	20		Amps
+5V	0	-	15		Amps
+12V	0	-	50		Amps
-12V	0	-	0.3		Amps
+5VSb	0	-	2.5		Amps

Notes:

- (1) The maximum combined load on +5V and +3.3V outputs shall not exceed 90W.
- (2) The maximum combined load on +12V outputs shall not exceed 600W(50A).
- (3) The maximum continuous average DC outputs power shall not exceed 600W.

2.3 Output Ripple

2.3.1 Ripple regulation

Parameter	Ripple&Noise	Unit
+3.3V	50	mVp-p
+5V	50	mVp-p
+12V	120	mVp-p
-12V	120	mVp-p
+5VSb	50	mVp-p

2.3.2 Definition

The ripple voltage of the outputs shall be measured at the pins of the output connector when terminated in the load impedance specified in figure1. Ripple and noise are measured at the connectors with a 0.1uF ceramic capacitor and a 10uF electrolytic capacitor to simulate system loading. Ripple shall be measured under any condition of line voltage, output load, line frequency, operation temperature.

2.3.3 Ripple voltage test circuit

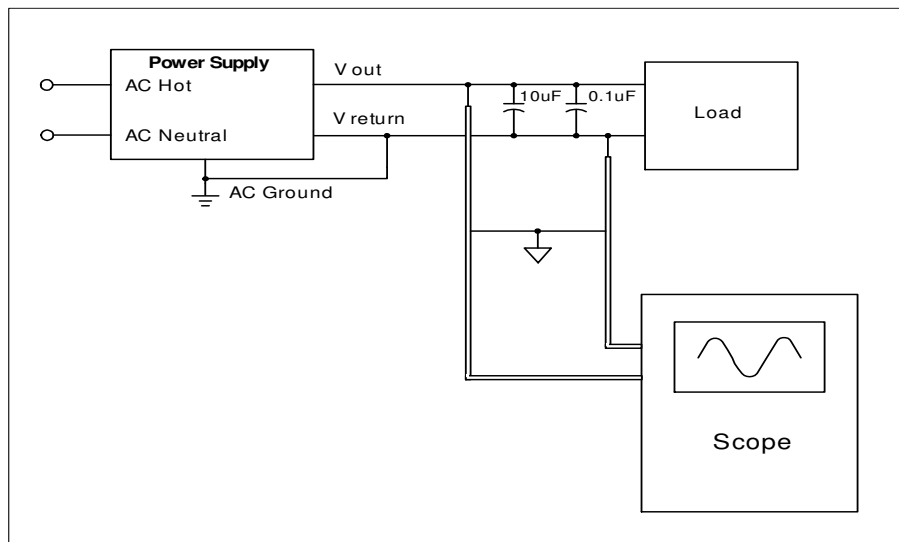


Figure 1. Ripple voltage test circuit

2.4 Overshoot

Any overshoot at turn on or turn off shall be less 10% of the nominal voltage value, all outputs shall be within the regulation limit of section 2.0 before issuing the power good signal of section 5.0.

2.5 Efficiency

Power supply efficiency typical 87%/20% Loading, 90%/50% Loading, 87%/100% Loading, at normal AC main voltage.

2.6 Remote on/off control

When the logic level "PS-ON" is low, the DC outputs are to be enabled.

When the logic level is high or open collector, the DC outputs are to be disabled.

3.0 PROTECTION

3.1 Over-power protection

The power supply will be shutdown and latch off when output power over 110% ~ 160% of rated DC output.

3.2 Over current protection

The power supply shall have current limit to prevent the +3.3V, +5V, and +12V outputs from exceeding the values shown in the following Table. If the current limits are exceeded the power supply shall shutdown and latch off.

Voltage		Over Current Limit (I _{out} limit)
+12V	500W	44A minimum; 60A maximum
	550W	50A minimum; 68A maximum
	600W	55A minimum; 75A maximum
+5V	17A minimum; 45A maximum	
+3.3V	22A minimum; 45A maximum	

3.3 Over voltage protection

The over voltage sense circuitry and reference shall reside in packages that are separate and distinct from the regulator control circuitry and reference. No single point fault shall be able to cause a sustained over voltage condition on any or all outputs. The supply shall provide latch-mode over voltage protection as defined in Table.

Output	Minimum	Nominal	Maximum	Unit
+12 VDC	13.4	15.0	16.5	Volts
+5 VDC	5.74	6.3	7.0	Volts
+3.3 VDC	3.76	4.2	5.1	Volts

3.4 Short circuit

An output short circuit is defined as any output impedance of less than 0.1 ohms. The power supply shall shut down and latch off for shorting the +3.3 VDC, +5 VDC, or +12 VDC rails to return or any other rail. Shorts between main output rails and +5VSB shall not cause any damage to the power supply. The power supply shall either shut down and latch off or fold back for shorting the negative rails. +5VSB must be capable of being shorted indefinitely, but when the short is removed, the power supply shall recover automatically or by cycling PS_ON#. The power supply shall be capable of withstanding a continuous short-circuit to the output without damage or overstress to the unit.

3.5 No load operation

No damage or hazardous condition should occur with all the DC output connectors disconnected from the load. The power supply may latch into the shutdown state.

4.0 TIMING

4.1 Signal timing drawing

Figure 2 is a reference for signal timing for main power connector signals and rails.

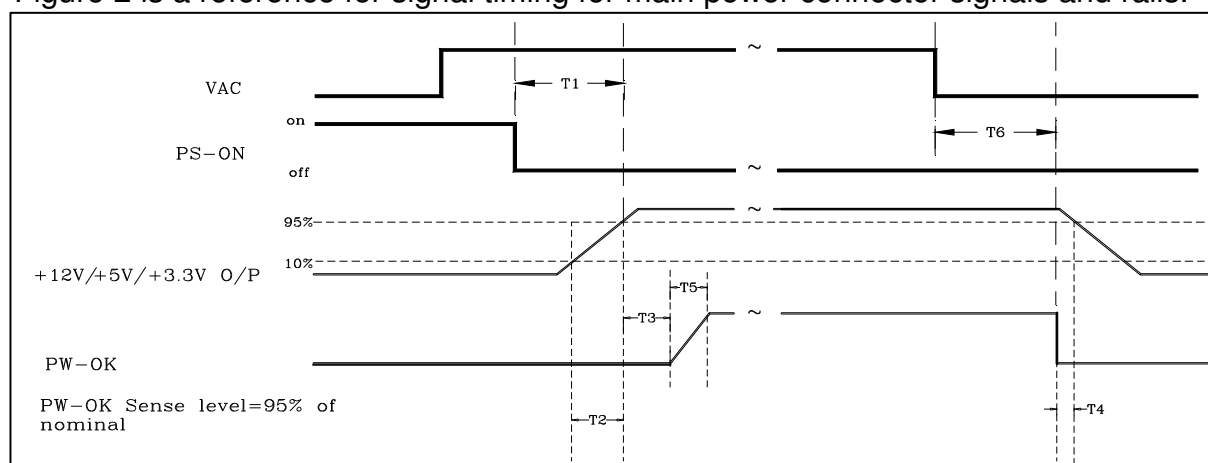


Figure 2. PS-OK Timing Sequence

- (1) T2: Rise time (0.2ms~20ms)
- (2) T3: Power good signal turn on delay time (100ms~500ms)
- (3) T4: Power good signal turn off delay time (1ms min)
- (4) T5: Rise time (10ms max)

4.2 Output Transient Response

Table 13. summarizes the expected output transient step sizes for each output. The transient load rate is =1.0A/us.

Table 13. DC Output Transient Step Sizes

Output	Max.step size	Max.step size	
	(% of rated output amps per Sec 3.2.3) ⁽¹⁾	(amps)	
+12 VDC	40%		
+5 VDC	30%		
+3.3 VDC	30%		
-12 VDC		0.1A	
+5 VSB		0.5A	

⁽¹⁾ For example, for a rated +5 VDC output of 18A, the transient step would be 30% x 18A=5.4A. Output voltages should remain within the regulation limits of Section 2.1, and the power supply should be stable when subjected to load transients per Table 13. from any steady state load, including any or all of the following conditions:

Simultaneous load steps on the +12 VDC, +5 VDC, and +3.3 VDC outputs

(all steps occurring in the same direction)

Load-changing repetition rate of 50 Hz to 10 kHz

AC input range per Section 1.0

4.3 Hold up time

When the power loss its input power, it shall maintain 12ms at 75% load in regulation limit at nominal input voltage. (AC:115V/60Hz or 230V/50Hz)

4.4 Test conditions:

Test	Voltage	End	Duration	Load	Frequency
	[Vac]	Voltage			
		[Vac]	[cycles / ms]		[Hz]
1	230	0	0.5 / 10ms	75% Load	50
3	100	0	0.5 / 8.33ms	75%Load	60

5.0 ENVIRONMENT

5.1 Operation

Temperature	0 to 40 °C
Relative Humidity	to 85%,on-condensing

5.2 Shipping and Storage

Temperature	-20 to 90°C
Relative Humidity	to 95%,non-condensing

5.3 Altitude

Operating	10,000FT max.
Storage	50,000FT max.

AUDIT: 李復新 CHECK: DESIGN: H X X

ENP7150&7155&7160(半插拔) SPEC REV: 3.0

5 OF 9

2015-02-09

☞ 6.0 SAFETY**6.1 Underwriters Laboratory (UL) recognition.**

The power supply designed to meet UL 60950

☞ 7.0 ELECTROMAGNETIC COMPATIBILITY (EMC)**7.1 ELECTROSTATIC DISCHARGE (ESD) - IEC 61000 – 4 - 2 : 2008****7.2 ELECTRICAL FAST TRANSIENT / BURST (EFT/B) – IEC 61000 – 4 - 4 : 2012****7.3 SURGE – IEC 61000 – 4 - 5 : 2005****7.4 POWER FREQUENCY MAGNETIC FIELD – IEC 61000 – 4 - 8 : 2009****7.5 VOLTAGE DIPS – IEC 61000 – 4 - 11 : 2004****7.6 RADIATED SUSCEPTIBILITY – IEC 61000 – 4 – 3 : 2006+A1 : 2007+A2 : 2010****7.7 CONDUCTED SUSCEPTIBILITY – IEC 61000 – 4 - 6 : 2008****7.8 VOLTAGE FLUCTUATION - EN 61000 – 3 – 3 : 2008****7.9 EN61000-3-2 : 2006+A2 : 2009 harmonic current emissions.**

If applicable to sales in Europe, the power supply shall meet the requirements of EN 61000-3-2 Class D and the Guidelines for the Suppression of Harmonics in Appliances and General Use Equipment Class D for harmonic line current content at full-rated power.


7.10 EN55022:2010/AC : 2011 Class B Radio interference (CISPR 22).**7.11 ANSI C63.4-2009/FCC Part 15, Subpart B/ICE-003 Issue 5 class B 115VAC operation.****☞ 8.0 MTBF****8.1 MTBF (mean time between failures) calculation**

The demonstrated MTBF shall be 100,000 hours of continuous operation at 25°C of full load and 120V AC input. The MTBF of the power supply shall be calculated in accordance with MIL-HDBK-217F. The DC FAN is not included.

9.0 MECHANICAL REQUIREMENTS

9.1 Physical dimension Dim (L125*W100*H63.5)

(線材組合&外露長度僅供參考，可根據客戶要求更改或新增)

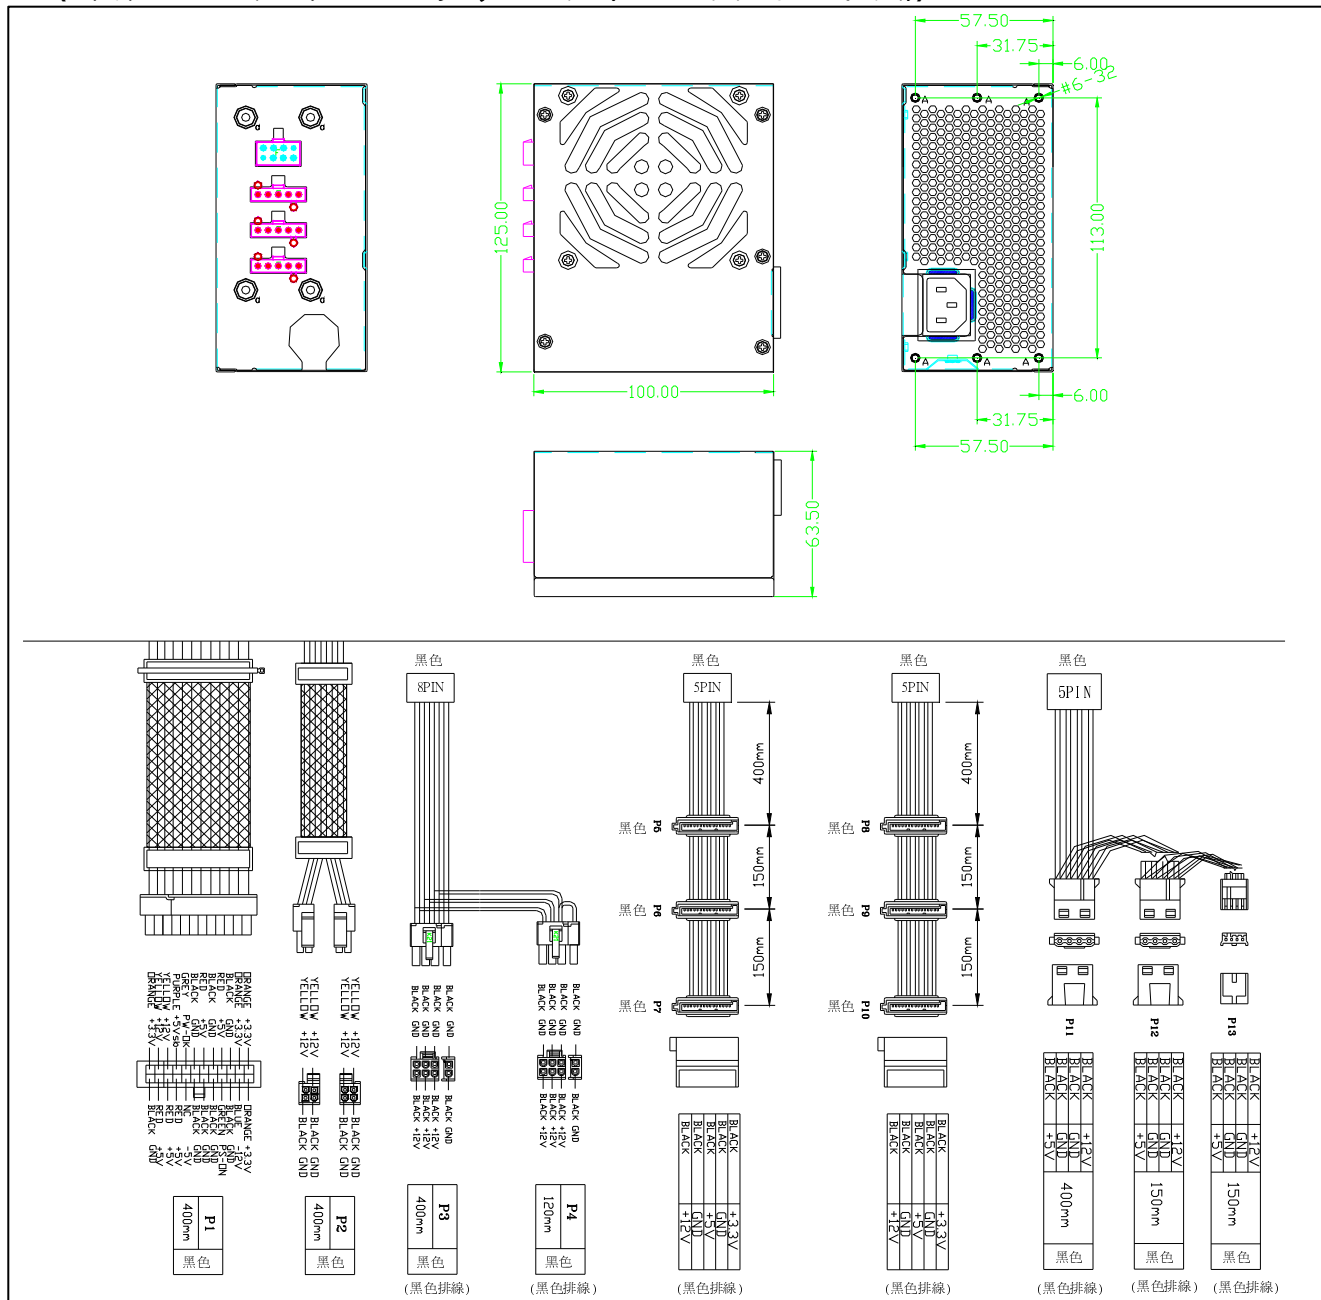

9.2 Connectors (INTEL approved equivalent)**P1 connector (Molex 39-01-2200 or equivalent)**

16AWG wire	Signal	Pin	Pin	Signal	16AWG wire
Orange (18AWG)	+3.3V	11	1	+3.3V	Orange (18AWG)
Orange (22AWG)	3.3 sense				
Blue (20AWG)	-12VDC	12	2	+3.3V	Orange (18AWG)
Black	GND	13	3	GND	Black
Green(22AWG)	PS-ON	14	4	+5VDC	Red (18AWG)
				+5V sense	Red (22AWG)
Black	GND	15	5	GND	Black
Black	GND	16	6	+5VDC	Red (18AWG)
Black	GND	17	7	GND	Black
White	NC	18	8	POK	Grey (22AWG)
Red (18AWG)	+5VDC	19	9	+5VSB	Purple (20AWG)
Red (18AWG)	+5VDC	20	10	+12VDC	Yellow
Yellow	+12VDC	M1	M3	+5VDC	Red (18AWG)
Orange (18AWG)	+3.3V	M2	M4	GND	Black

P2 Connector (4+4)PIN:Molex 39-01-2080 or equivalent)

16 AWG wire	Signal	Pin	Pin	Signal	16AWG wire
Black	GND	1	3	Yellow	+12VDC
Black	GND	2	4	Yellow	+12VDC

P3 6PIN

18AWG wire	Signal	Pin	Pin	Signal	18AWG wire
Yellow	+12VDC	1	4	GND	Black
Yellow	+12VDC	2	5	GND	Black
Yellow	+12VDC	3	6	GND	Black

P4 (6+2)PIN (Molex 90331-0010 or equivalent)

16AWG wire	Signal	Pin	Pin	Signal	16AWG wire
Yellow	+12VDC	1	4	GND	Black
Yellow	+12VDC	2	5	GND	Black
Yellow	+12VDC	3	6	GND	Black
Black	GND	1	2	GND	Black

**P5,P6 大4PIN(AMP 1-480424-0 or
Molex 8981-04P or equivalent)**

**P7 小4PIN(AMP 171822-4 or
equivalent)**

18 AWG wire	Signal	Pin	Pin	Signal	22AWG wire
Yellow	+12VDC	1	1	+12VDC	Yellow
Black	GND	2	2	GND	Black
Black	GND	3	3	GND	Black
Red	+5VDC	4	4	+5VDC	Red

P8,P9,P10 SATA Power Connector (Molex* 88751 or equivalent)(optional)

18AWG wire	Signal	Pin
Yellow	+12VDC	1
Black	GND	2
Red	+5VDC	3
Black	GND	4
Orange	+3.3V	5

☞ 10. FAN SPEED CONTROL

Fan voltage varies with the ambient temperature and/or output power.