

## MODEL NO. ENP7500

This specification describes the requirements of 150W/200W/250W with active P.F.C Switching Power Supply with an ATX form-factor, +5V standby voltage, fan control, ATX 12V Power supply version 2.3, remote on/off control, dual line input capability and forced air cooling characteristic

### 1.0 Table1. AC INPUT requirements

The input voltage, current, and frequency requirements for continuous operation are stated below.

Parameter	Min	Nom.	Max	Unit
Vin	90	<b>100 - 240</b>	264	VACrms
Vin Frequency	47	<b>60 - 50</b>	63	Hz
Iin(150W)		<b>2.5 - 1.5</b>		A
Iin(200W)		<b>3.5 - 2.0</b>		A
Iin(250W)		<b>4.0 - 2.0</b>		A

#### 1.1 Inrush current limiting

50 A @ 115Vrms

100 A @ 230Vrms (at 25°C ambient cold start).

} Can not damage during the ON/OFF test

### 2. DC OUTPUT

#### 2.1 Table 2. DC voltage regulation

Parameter	Range	Min	Nom.	Max	Unit
+3.3V	+/-5%	+3.14	+3.3	+3.47	Volts
+5V	+/-5%	+4.75	+5.0	+5.25	Volts
+12V	+/-5%	+11.40	+12.0	+12.6	Volts
-12V	+/-10%	-10.80	-12.0	-13.2	Volts
+5VSB	+/-5%	+4.75	+5.0	+5.25	Volts

#### 2.2 Load Ranges

##### 2.2.1 Table5 Typical Power Distribution for a 150W ATX12V Configuration

Parameter	Min	Nom.	Max	Peak	Unit
+3.3V	0.1	-	<b>6</b>		Amps
+5V	0.2	-	<b>7</b>		Amps
+12V	0.5	-	<b>11</b>		Amps
-12V	0.0	-	<b>0.2</b>		Amps
+5VSB	0.0	-	<b>2.5</b>		Amps

Note:

1. Total combined output load of +3.3V and +5V is  $\leq 50W$ .
2. +12V Maximum output power should not exceed **132W**.
3. When +3.3V load is over 3A, +12V min load is 2A
4. When +5V load is over 5A, +12V min load is 1A.
5. When +12V load is over 10A, +5V min load is 2A.

6. Maximum continuous total DC output power should not exceed **150W**.
7. Peak DC output power should not exceed **175W for 12 second**.

### 2.2.2 Table3 Typical Power Distribution for a 200W ATX12V Configuration

Parameter	Min	Nom.	Max	Peak	Unit
+3.3V	0.1	-	<b>8</b>	-	Amps
+5V	0.2	-	<b>9</b>	-	Amps
+12V	0.5	-	<b>15</b>	-	Amps
-12V	0.0	-	<b>0.2</b>	-	Amps
+5VSB	0.0	-	<b>2.5</b>	-	Amps

Note:

1. Total combined output load of +3.3V and +5V is  $\leq 60W$ .
2. +12V Maximum output power should not exceed **180W**.
3. When +3.3V load is over 3A, +12V min load is 2A
4. When +5V load is over 5A, +12V min load is 1A.
5. When +12V load is over 10A, +5V min load is 2A.
6. Maximum continuous total DC output power should not exceed **200W**.
7. Peak DC output power should not exceed **225W for 12 second**.

### 2.2.3 Table3 Typical Power Distribution for a 250W ATX12V Configuration

Parameter	Min	Nom.	Max	Peak	Unit
+3.3V	0.1	-	<b>9</b>	-	Amps
+5V	0.2	-	<b>10</b>	-	Amps
+12V	0.5	-	<b>18</b>	-	Amps
-12V	0.0	-	<b>0.2</b>	-	Amps
+5VSB	0.0	-	<b>2.5</b>	-	Amps

Note:

1. Total combined output load of +3.3V and +5V is  $\leq 70W$ .
2. +12V Maximum output power should not exceed **216W**.
3. When +3.3V load is over 3A, +12V min load is 2A
4. When +5V load is over 5A, +12V min load is 1A.
5. When +12V load is over 10A, +5V min load is 2A.
6. Maximum continuous total DC output power should not exceed **250W**.
7. Peak DC output power should not exceed **275W for 12 second**.

## 2.3 DC Output Ripple/Noise.

### 2.3.1 Table3 Ripple regulation

Parameter	Ripple&Noise	Unit
+3.3V	50	mVp-p
+5V	50	mVp-p
+12V	120	mVp-p
-12V	120	mVp-p
+5VSB	50	mVp-p

### 2.3.2 Definition

The ripple voltage of the outputs shall be measured at the pins of the output connector when terminated in the load impedance specified in figure 1. Ripple and noise are measured at the connectors with a 0.1uF ceramic capacitor and a 10uF electrolytic capacitor to simulate system loading. Ripple shall be measured under any condition of line voltage, output load, line frequency, operation temperature.

### 2.3.3 Figre3. Ripple/Noise voltage test circuit

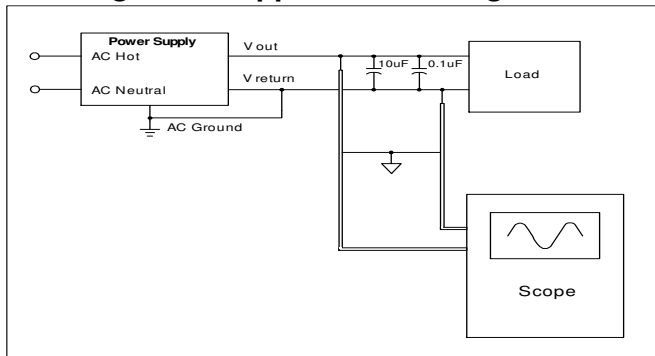


Figure 3. Ripple/Noise voltage test circuit

## 2.4 Overshoot

Any overshoot at turn on or turn off shall be less 10% of the nominal voltage value, all outputs shall be within the regulation limit of section 2.0 before issuing the power good signal of section 5.0.

## 2.5 Efficiency

(150W)Power supply typical efficiency is **80%** under full Load at nominal input voltage of 115VAC or 230VAC.

(200W,250W)Power supply typical efficiency is **82%** under full Load at nominal input voltage of 115VAC or 230VAC.

## 2.6 Remote on/off control

When the logic level "PS-ON" is low, the DC outputs are to be enabled.

When the logic level is high or open collector, the DC outputs are to be disabled.

## 3. PROTECTION

### 3.1 Over-power protection

The power supply will be shutdown and latch off when output power is 110%~160%.

### 3.2 Over voltage protection

The over voltage sense circuitry and reference shall reside in packages that are separate and distinct from the regulator control circuitry and reference. No single point fault shall be able to cause a sustained over voltage condition on any or all outputs. The supply shall provide latch-mode over voltage protection as defined in Table.


Output	Minimum	Nominal	Maximum	Unit
+12 VDC	13.4	15.0	<b>16</b>	Volts
+5 VDC	5.74	6.3	7.5	Volts
+3.3 VDC	3.76	4.2	4.8	Volts

### 3.3 Over temperature protection

## 4. TIMING

### 4.1 Signal timing drawing

Figure 4 is a reference for signal timing for main power connector signals and rails.

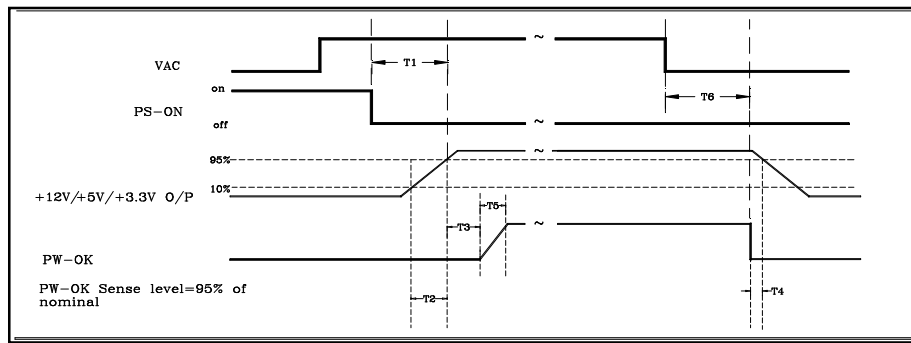

**Figure 4. PS-OK Timing Sequence**

- (1)T2: Rise time (0.1ms~20ms)
- (2)T3: Power good turn on delay time (100ms~500ms)
- (3)T4: Power good turn off delay time (1ms min)
- (4)T5: Rise time (10ms max)

## 4.2 .Output Transient Response

Table 13. summarizes the expected output transient step sizes for each output.

The transient load slew rate is =1.0A/us.

**Table 13. DC Output Transient Step Sizes**

Output	Max.step size (% of rated output amps per Sec 3.2.3) <sup>(1)</sup>	Max.step size (amps)
+12 VDC	40%	
+5 VDC	30%	
+3.3 VDC	30%	
-12 VDC		0.1A
+5 VSB		0.5A

<sup>(1)</sup> For example, for a rated +5 VDC output of 18A, the transient step would be 30% x 18A=5.4A

Output voltages should remain within the regulation limits of Section 2.1, and the power supply should be stable when subjected to load transients per Table 13. from any steady state load, including any or all of the following conditions:

- \* Simultaneous load steps on the +12 VDC, +5 VDC, and +3.3 VDC outputs (all steps occurring in the same direction)
- \* Load-changing repetition rate of 50 Hz to 10 kHz
- \* AC input range per Section 1.0
- \* +5Vsb Loading min 0.1A
- \* +12V loading min 0.6A

## 4.3 Hold up time (T6 of figure 4.)

When the power loss its input power, The output shall maintain **16ms** in regulation ranges  
**Tested at 75% of maximum load** and AC:115V/60Hz or 230V/50Hz.

## 4.4 Capacitive Load-REQUIRED

The power supply should be able to power up and operate with the regulation limits defined in Table 15, With the following capacitances simultaneously present on the DC outputs.

**Output Capacitive Loads**

Output	Capacitive Load(uF)
+12VDC	10000
+5VDC	10000
+3.3VDC	10000
+5VSB	6000
-12VDC	330

## 5. ENVIRONMENT

**5.1 Operation**

Temperature	0°C to 40°C
Relative Humidity	20 to 85%, non-condensing

**5.2 Shipping and Storage**

Temperature	-20 to 90°C
Relative Humidity	5 to 90%, non-condensing

**5.3 Altitude**

Operating	2000m
Storage	3000m

## 6. SAFETY

**6.1 Underwriters Laboratory (UL) recognition.**

The power supply designed to meet UL 60950.

## 7. ELECTROMAGNETIC COMPATIBILITY (EMC)

**7.1 ELECTROSTATIC DISCHARGE (ESD) - IEC 61000 – 4 - 2 : 2008**

**7.2 ELECTRICAL FAST TRANSIENT / BURST ( EFT/B) – IEC 61000 – 4 - 4 : 2012**

**7.3 SURGE – IEC 61000 – 4 - 5 : 2014**

**7.4 POWER FREQUENCY MAGNETIC FIELD – IEC 61000 – 4 - 8 : 2009**

**7.5 VOLTAGE DIPS – IEC 61000 – 4 - 11 : 2004**

**7.6 RADIATED SUSCEPTIBILITY – IEC 61000 – 4 – 3 : 2006+A1 : 2007+A2 : 2010(IEC 61000 – 4 – 3 : 2010)**

**7.7 CONDUCTED SUSCEPTIBILITY – IEC 61000 – 4 - 6 : 2008(IEC 61000 – 4 – 6 : 2013)**

**7.8 VOLTAGE FLUCTUATION - EN 61000 – 3 – 3 : 2008 (EN 61000 – 3 – 3 : 2013)**

**7.9 EN61000-3-2 : 2006+A2 : 2009 harmonic current emissions.(EN 61000 – 3 – 2 : 2014)**

If applicable to sales in Europe, the power supply shall meet the requirements of EN 61000-3-2 Class D and the Guidelines for the Suppression of Harmonics in Appliances and General Use Equipment Class D for harmonic line current content at full-rated power.

**7.10 EN55022 : 2010/AC : 2011 Class B Radio interference (CISPR 22).**

**7.11 ANSI C63.4-2009 / FCC Part 15 Subpart B / ICE-003 Issue 5 class B 115VAC operation.**

## 8. MTBF

**8.1 MTBF (MEAN TIME BETWEEN FAILURES) CALCULATION**

The demonstrated MTBF shall be 100,000 hours of continuous operation at 25°C,full load, 80% confidence limit and nominal line. The MTBF of the power supply shall be calculated in


accordance with MIL-STD-217D/E. The DC FAN is not included.

## 9. MECHANICAL REQUIREMENTS


### 9.1 Physical Dimension : B型 (150mm\*81.5mm\*40.5mm)

(線材組合&外露長度僅供參考，可根據客戶要求更改或新增。)

**B型150W/200W**

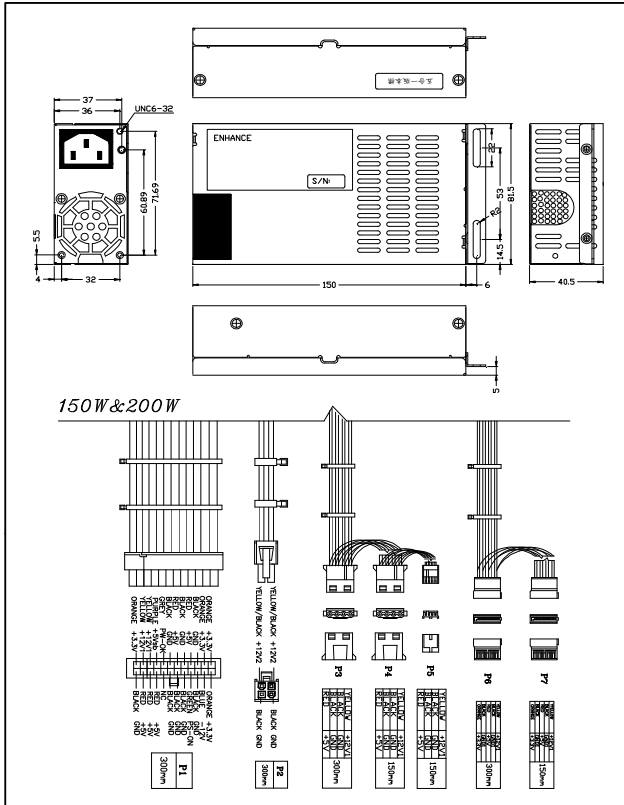

**B型250W**

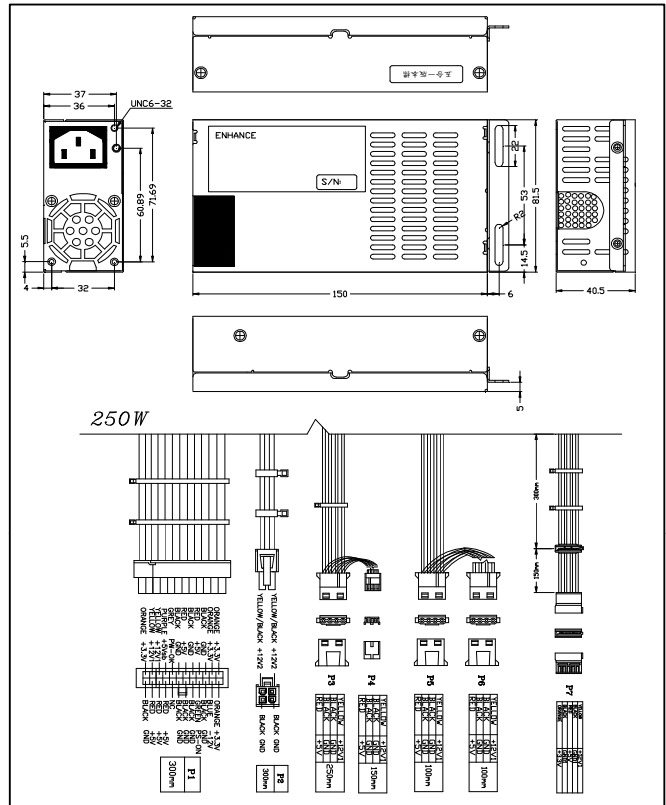

### 9.2 Connectors (INTEL approved equivalent)

#### P1 (Motherboard 20Pin) Power Connector

18AWG wire	Signal	Pin	Pin	Signal	18AWG wire
Orange	+3.3V	11	1	+3.3V	Orange
Blue	-12VDC	12	2	+3.3V	Orange

Black	COM	13	3	COM	Black
Green(20AWG)	PS-ON	14	4	+5VDC	Red
Black	COM	15	5	COM	Black
Black	COM	16	6	+5VDC	Red
Black	COM	17	7	COM	Black
White	NC	18	8	POK	Grey(20AWG)
Red	+5VDC	19	9	+5VSB	Purple
Red	+5VDC	20	10	+12VDC	Yellow

**P2 (4 Pin) Power Connector**

18 AWG wire	Signal	Pin	Pin	Signal	20AWG wire
Yellow	+12V	1	3	COM	Black
Yellow	+12V	2	4	COM	Black

**P3 (SATA) Power Connector**

18 AWG wire	Signal	Pin
Orange	+3.3V	5
Black	GND	4
Red	+5V	3
Black	GND	2
Yellow	+12V	1

**P4 (大4PIN) Power Connector****P5 (小4PIN) Power Connector**

18 AWG wire	Signal	Pin	Pin	Signal	18 AWG wire
Yellow	+12V	1	1	+12V	Yellow
Black	COM	2	2	COM	Black
Black	COM	3	3	COM	Black
Red	+5V	4	4	+5V	Red

**10. FAN SPEED CONTROL(OPTION)**

Main fan voltage varies with the ambient temperature or output power.