

MODEL NO. ENP7000 SERIES (ACTIVE PFC)

This specification describes the requirements of 200,250Watts with full range voltage,switching power supply with an FLEX-ATX form-factor and TFX 12V, +5V standby voltage, remote on/off .

☞ 1.0 AC INPUT

1.1 AC input requirements

The input voltage, current, and frequency requirements for continuous operation are stated below.

Table 1 AC Input Line Requirements

Parameter	Min	Nom.	Max	Unit
Vin	90	100-240	264	VACrms
Vin Frequency	47	50	63	Hz
Iin(200W)		3.0---1.3		Arms
Iin(250W)		3.5---1.5		Arms

Power factor correction (PF)>0.9 at full load.

1.2 Inrush current regulation

The power supply must meet inrush requirements for any rated AC voltage, during turn on at any phase of AC voltage, during a single cycle AC dropout condition, during repetitive ON/OFF cycling of AC, and over the specified temperature range (Top). The peak inrush current shall be less than the ratings of its critical components (including input fuse, bulk rectifiers, and surge limiting device).

☞ 2.0 DC OUTPUT

2.1 DC voltage regulation

Parameter	Range	Min	Nom.	Max	Unit
+3.3V	±5%	+3.14	+3.3	+3.47	Volts
+5V	±5%	+4.75	+5.0	+5.25	Volts
+12V1	±5%	+11.4	+12.0	+12.6	Volts
+12V2	±5%	+11.4	+12.0	+12.6	Volts
-12V	±10%	-10.8	-12.0	-13.2	Volts
+5VSb	±5%	+4.75	+5.0	+5.25	Volts

1. At no load, 3.3V output +/-5% regulation limits do not apply.

2. At +12V surge, regulation can go to +/-10%.

2.2 LOAD RANGE**2.2.1 ENP7020(200 Watts)**

Parameter	Min	Nom.	Max	Peak	Unit
+3.3V	0.1	-	13		Amps
+5V	0.2	-	14		Amps
+12V1	0.6	-	14	16	Amps
+12V2	0.6	-	14	16	Amps
-12V	0.0	-	0.3		Amps
+5VSb	0.0	-	2	2.5	Amps

Notes:

- (1) +5VSb is a SELV standby voltage that is always present when AC mains voltage is present.
- (2) The maximum combined load on +5V and +3.3V outputs shall not exceed 80W
- (3) The maximum continuous average DC outputs power shall not exceed 200W
- (4) The maximum peak total DC outputs power shall not exceed 220W
- (5) When +12V load is 14A,the Min load of +5V is 2A.
- (6) +12V total DC output power shall not exceed 176W
- (7) Peak total output power not to exceed 12 seconds in duration .

2.2.2 ENP7025(250 Watts)

Parameter	Min	Nom.	Max	Peak	Unit
+3.3V	0.1	-	13		Amps
+5V	0.2	-	14		Amps
+12V1	0.6	-	18	20	Amps
+12V2	0.6	-	18	20	Amps
-12V	0.0	-	0.3		Amps
+5VSb	0.0	-	2	2.5	Amps

Notes:

- (1) +5VSb is a SELV standby voltage that is always present when AC mains voltage is present.
- (2) The maximum combined load on +5V and +3.3V outputs shall not exceed 80W
- (3) The maximum continuous average DC outputs power shall not exceed 250W
- (4) The maximum peak total DC outputs power shall not exceed 270W
- (5) When +12V load is 14A,the Min load of +5V is 2A.
- (6) +12V total DC output power shall not exceed 225 W
- (7) Peak total output power not to exceed 12 seconds in duration .

2.3 Output Ripple


2.3.1 Ripple regulation

Parameter	Ripple&Noise	Unit
+3.3V	50	mVp-p
+5V	50	mVp-p
+12V1	120	mVp-p
+12V2	120	mVp-p
-12V	120	mVp-p
+5VSb	50	mVp-p

2.3.2 Definition

The ripple voltage of the outputs shall be measured at the pins of the output connector when terminated in the load impedance specified in figure1. Ripple and noise are measured at the connectors with a 0.1uF ceramic capacitor and a 10uF electrolytic capacitor to simulate system loading. Ripple shall be measured under any condition of line voltage, output load, line frequency, operation temperature.

2.3.3 Ripple voltage test circuit

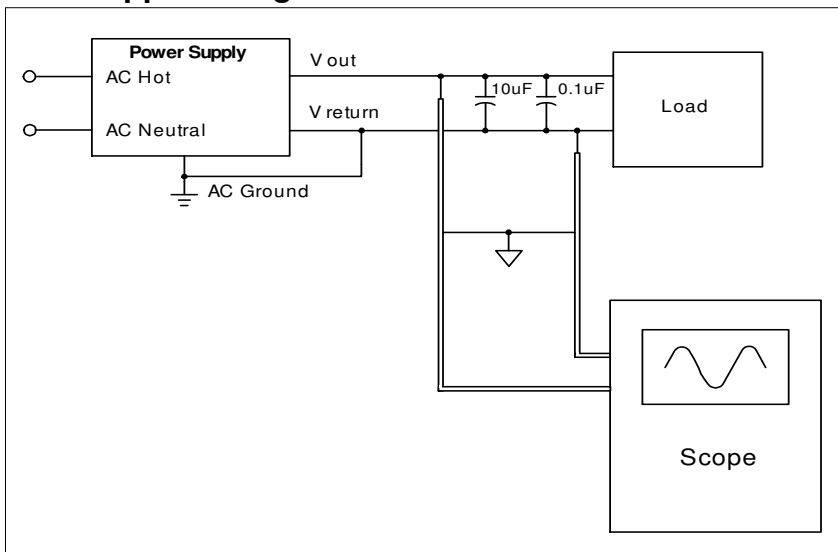

2.4 Overshoot

Any overshoot at turn on or turn off shall be less 10% of the nominal voltage value, all outputs shall be within the regulation limit of section 2.0 before issuing the power good signal of section 5.0.

2.5 Efficiency

Power supply efficiency **typical 80%** at normal AC main voltage and full load on all outputs.

2.6 Remote on/off control

When the logic level "PS-ON" is low, the DC outputs are to be enabled.

When the logic level is high or open collector, the DC outputs are to be disabled.

☛ 3.0 PROTECTION

3.1 Over-power protection

The power supply will be shutdown and latch off when output power over 110% ~ 150% of rated DC output.

3.2 Over voltage protection

The over voltage sense circuitry and reference shall reside in packages that are separate and distinct from the regulator control circuitry and reference. No single point fault shall be able to cause a sustained over voltage condition on any or all outputs. The supply shall provide latch-mode over voltage protection as defined in Table.

output	Minimum	Nominal	Maximum	Unit
+12 VDC	13.4	15.0	15.6	Volts
+5 VDC	5.74	6.3	7.0	Volts
+3.3 VDC	3.76	4.2	4.3	Volts

3.3 Short circuit

An output short circuit is defined as any output impedance of less than 0.1 ohms. The power supply shall shut down and latch off for shorting the +3.3 VDC,+5 VDC,or+12 VDC rails to return or anyother rail. Shorts between main output rails and +5VSB shall not cause any damage to the power supply. The power supply shall either shut down and latch off or fold back for shorting the negative rails.+5VSB must be capable of being shorted indefinitely, but when the short is removed,the power supply shall recover automatically or by cycling PS_ON#.The power supply shall be capable of with standing a continuous short-circuit to the output without damage or overstress to the unit


3.4 No load operation

No damage or hazardous condition should occur with all the DC output connectors disconnected from the load. The power supply may latch into the shutdown state.

4.0 TIMING

4.1 Signal timing drawing

Figure 2 is a reference for signal timing for main power connector signals and rails.

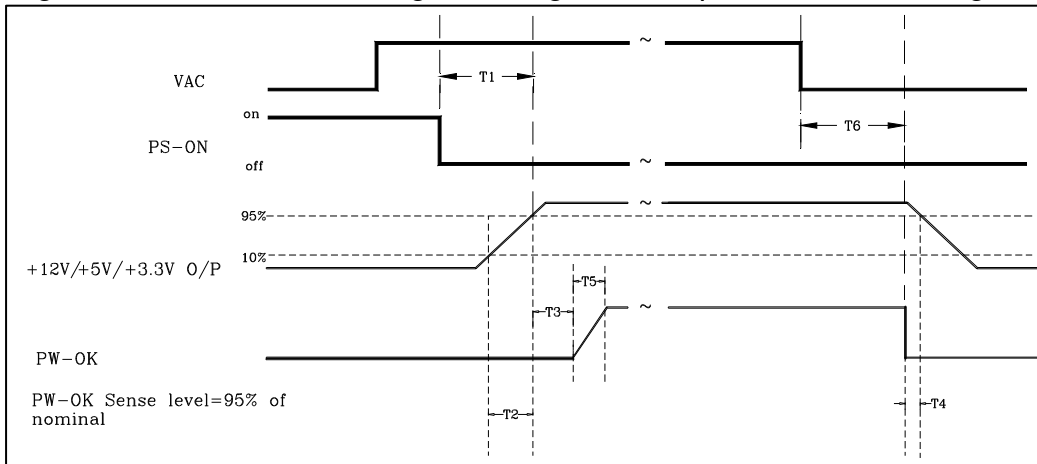

PS-OK Timing Sequence

- (1)T2: Rise time (0.2ms~20ms)
- (2)T3: Power good signal turn on delay time (100ms~500ms)
- (3)T4: Power good signal turn off delay time (1ms min)
- (4)T5: Rise time (10ms max)

4.2 .Output Transient Response

Summarizes the expected output transient step sizes for each output. The transient load slew rate is =1.0A/us.

DC Output Transient Step Sizes

Output	Max.step size (% of rated output amps per Sec 3.2.3) ⁽¹⁾	Max.step size (amps)
+12 V1DC	40%	
+12 V2DC	40%	
+5 VDC	30%	
+3.3 VDC	30%	
-12 VDC		0.1A
+5 VSB		0.5A

⁽¹⁾ For example, for a rated +5 VDC output of 18A,the transient step would be 30% x 18A=5.4A Output voltages should remain within the regulation limits of Section 2.1,and the power supply should be stable when subjected to load transients per Table 13. from any steady state load, including any or all of the following conditions:
 Simultaneous load steps on the +12 VDC,+5 VDC,and +3.3 VDC outputs (all steps occurring in the same direction)
 Load-changing repetition rate of 50 Hz to 10 kHz
 AC input range per Section 1.0

9.2 Connectors (INTEL approved equivalent)

M/B 20PIN (Molex 39-01-2200 or equivalent)

20AWG wire	Signal	Pin	Pin	Signal	20AWG wire
Orange	+3.3V	11	1	+3.3V	Orange
Orange(22AWG)	3.3 sense	11			
Blue	-12VDC	12	2	+3.3V	Orange
Black	COM	13	3	COM	Black
Green	PS-ON	14	4	+5VDC	Red
Black	COM	15	5	COM	Black
Black	COM	16	6	+5VDC	Red
Black	COM	17	7	COM	Black
White	NC	18	8	POK	Grey
Red	+5VDC	19	9	+5VSB	Purple
Red	+5VDC	20	10	+12VDC	Yellow

HDD(AMP 1-480424-0 or Molex 8981-04P or equivalent)

Flopy (AMP 171822-4 or equivalent)

20 AWG wire	Signal	Pin	Pin	Signal	22AWG wire
Yellow	+12VDC	1	1	+5VDC	Red
Black	COM	2	2	COM	Black
Black	COM	3	3	COM	Black
Red(optional)	+5VDC	4	4	+12VDC	Yellow

ATX12V Connector (Molex 39-01-2060 or equivalent)

20 AWG wire	Signal	Pin	Pin	Signal	20AWG wire
Black	GND	1	3	Yellow	+12V
Black	GND	2	4	Yellow	+12V

Serial ATA Connector (Molex* 88751 or equivalent)

18 /20AWG wire	Signal	Pin
Orange	+3.3V	5
Black	GND	4
Red	+5V	3
Black	GND	2
Yellow	+12V	1

10. FAN SPEED CONTROL

Fan voltage varies with the ambient temperature and/or output power.